

TERREBONNE PARISH CONSOLIDATED GOVERNMENT

SOUTH PLANT OXIDATION POND CELL NO. 2 LEVEE REPAIRS

(HURRICANE IDA)

PARISH PROJECT NO. FRA-006

FEMA NO. 815690

ADDENDUM NO. 1

Date Issued: July 23, 2026

This Addendum No. 1 shall be part of the above referenced project.

Acknowledge receipt of this Addendum No. 1 by inserting its number in the space provided in the Louisiana Uniform Public Work Bid Form of the Request for Proposals. Failure to do so may subject the bidder to disqualification.



Kevan Keiser, P.E.

GIS Engineering, LLC.

TERREBONNE PARISH CONSOLIDATED GOVERNMENT
SOUTH PLANT OXIDATION POND CELL NO. 2 LEVEE REPAIRS
(HURRICANE IDA)
PARISH PROJECT NO. FRA-006
FEMA NO. 815690

This Addendum is issued for the purpose of modifying, clarifying, or revising, as applicable, the specified items of the original Contract Documents. It is also issued for the purpose of adding, as applicable, the attached specified items to the original Contract Documents, or deleting, as applicable, the attached specified items from the original Contract Documents. The Addendum and attachments shall be construed as much a part of the original Contract Documents as contained therein. Changes made by Addenda shall take precedence over original Contract Documents.

PART I – WRITTEN CONTRACTORS QUESTIONS

PART II – MODIFICATIONS TO CONTRACT DOCUMENTS, TECHNICAL SPECIFICATIONS, PLANS, AND OTHER DOCUMENTS

Modifications to Contract Documents and Technical Specifications.

PART III – ATTACHMENTS

1. Pre-Bid Conference Sign-In Sheet
2. Pre-Bid Conference Meeting Notes
3. Plan Sheet 04 – Volume Tables (Revised as per Addendum No. 1)
4. Plan Sheet 05 – Typical Details (Revised as per Addendum No. 1)
5. Plan Sheet 08 – Segments 1 & 2 Levee Rehab Plan and Profiles (3 of 5) (Revised as per Addendum No. 1)
6. Plan Sheet 09 – Segments 2 & 3 Levee Rehab Plan and Profiles (4 of 5) (Revised as per Addendum No. 1)
7. Plan Sheet 11 – Segment 1 Levee Rehab Proposed Sections (1 of 8) (Revised as per Addendum No. 1)
8. Plan Sheet 12 – Segment 1 Levee Rehab Proposed Sections (2 of 8) (Revised as per Addendum No. 1)
9. Plan Sheet 13 – Segment 1 & 2 Levee Rehab Proposed Sections (3 of 8) (Revised as per Addendum No. 1)
10. Plan Sheet 14 – Segment 2 Levee Rehab Proposed Sections (4 of 8) (Revised as per Addendum No. 1)
11. Plan Sheet 15 – Segment 2 Levee Rehab Proposed Sections (5 of 8) (Revised as per Addendum No. 1)
12. Plan Sheet 16 – Segments 2 & 3 Levee Rehab Proposed Sections (6 of 8) (Revised as per Addendum No. 1)
13. Plan Sheet 17 – Segment 3 Levee Rehab Proposed Sections (7 of 8) (Revised as per Addendum No. 1)
14. Plan Sheet 18 – Segment 3 Levee Rehab Proposed Section (8 of 8) (Revised as per Addendum No. 1)

PART I – Written Contractors’ Questions

NOTE – The responses presented in PART I may differ from those presented in the Pre-Bid Conference. The responses in PART I are current as of the date of this Addendum and if different supersede those provided at the Pre-Bid Conference or any previous addenda.

Contractors’ General Questions Received

1. What is the water range in the cells?

Response: The Parish attempts to maintain the water elevation at +4.5’; however, due to rainfall, this elevation can fluctuate.

2. Will some of the mats need to be placed underwater?

Response: The concrete mats shall be placed according to the Engineering Plans and Specifications provided.

3. Is there a laydown area that can be used? Where can the contractor offload materials?

Response: Yes. The laydown area is where the haul road meets the intersection of Segment 2 & Segment 3.

4. Are there areas that are restricted to be used as a haul route?

Response: Yes. The haul route shall be limited to only the areas depicted by the “Red Arrows” as shown on Plan Sheet 03.

PART II – Modifications To Contract Documents, Technical Specifications, Plans, and Other Documents

Contract Documents:

1. Section C – Uniform Public Work Bid Form
 - a. Please remove and replace with the revised Bid Form provided in Part III of this Addendum.

Technical Specifications:

NONE

Plans

1. Plan Sheet 04 – Volume Tables
 - a. Please remove and replace with the revised Plan Sheet 04 provided in Part III of this Addendum.
2. Plan Sheet 05 – Typical Details
 - a. Please remove and replace with the revised Plan Sheet 05 provided in Part III of this Addendum.
3. Plan Sheet 08 – Segments 1 & 2 Levee Rehab Plan and Profiles (3 of 5)
 - a. Please remove and replace with the revised Plan Sheet 08 provided in Part III of this Addendum.
4. Plan Sheet 09 – Segments 2 & 3 Levee Rehab Plan and Profiles (4 of 5)
 - a. Please remove and replace with the revised Plan Sheet 09 provided in Part III of this Addendum.
5. Plan Sheet 11 – Segment 1 Levee Rehab Proposed Sections (1 of 8)
 - a. Please remove and replace with the revised Plan Sheet 11 provided in Part III of this Addendum.
6. Plan Sheet 12 – Segment 1 Levee Rehab Proposed Sections (2 of 8)
 - a. Please remove and replace with the revised Plan Sheet 12 provided in Part III of this Addendum.
7. Plan Sheet 13 – Segment 1 & 2 Levee Rehab Proposed Sections (3 of 8)
 - a. Please remove and replace with the revised Plan Sheet 13 provided in Part III of this Addendum.
8. Plan Sheet 14 – Segment 2 Levee Rehab Proposed Sections (4 of 8)
 - a. Please remove and replace with the revised Plan Sheet 14 provided in Part III of this Addendum.
9. Plan Sheet 15 – Segment 2 levee Rehab Proposed Sections (5 of 8)
 - a. Please remove and replace with the revised Plan Sheet 15 provided in Part III of this Addendum.
10. Plan Sheet 16 – Segments 2 & 3 Levee Rehab Proposed Sections (6 of 8)
 - a. Please remove and replace with the revised Plan Sheet 16 provided in Part III of this Addendum.
11. Plans Sheet 17 – Segment 3 Levee Rehab Proposed Sections (7 of 8)
 - a. Please remove and replace with the revised Plan Sheet 17 provided in Part III of this Addendum.
12. Plans Sheet 18 – Segment 3 Levee Rehab Proposed Sections (8 of 8)
 - a. Please remove and replace with the revised Plan Sheet 18 provided in Part III of this Addendum.

PART III - ATTACHMENTS

Pre-Bid Meeting Notes & Sign-In Sheet



Project: Terrebonne Parish Consolidated Government
South Plant Oxidation Pond Cell No. 2 Levee Repairs
(Hurricane Ida)
GIS Project No. 39130-1683

Date: Wednesday, July 22, 2026 at 2:00 P.M.

Location: GIS Engineering, LLC
197 Elysian Drive
Houma, LA 70363

PRE-BID MEETING NOTES

1. Roster Signatures and Introductions

- a. Owner – Terrebonne Parish Consolidated Government
- b. Engineer – GIS Engineering, LLC (GIS)
- c. *Consultant – Royal Engineers*

2. Scope of Work

This project consists of the following in the treatment plants Cell No. 2:

- **Segment 1:** Earthen levee rehabilitation (approximately 1,525 LF) of existing levee to an elevation of +8.0' NAVD88 and installation of rip rap on the interior side slope, with the intent to reduce future erosion on the levee.
- **Segment 2:** Rehabilitation of the levee crown/access road (approximately 1,750 LF) with 610 limestone on the access road to an elevation of +8.5' NAVD88 and concrete mat installation along the interior levee side slopes, with the intent to reduce future erosion on the levee. *The existing mats can be pushed down into the pond.*
- **Segment 3:** Rehabilitation of the levee crown/access road (approximately 1,270 LF) with 610 limestone on the access road to an elevation of +8.0' NAVD88 and installation of rip rap on the interior side slope, with the intent to reduce future erosion on the levee.
- **Segment 4:** Earthen levee rehabilitation (approximately 1,300 LF) of existing levee to an elevation of +8.0' NAVD88 and installation of rip rap on the interior side slope, with the intent to reduce future erosion on the levee.

3. Delivery of Bids

Sealed bids will be received on Wednesday, August 5, 2026, by the Terrebonne Parish Consolidated Government (TPCG) Purchasing Division, at the 301 Plant Road, Houma, LA 70363 until 3:00 P.M as shown on the Purchasing Division Conference Room Clock, and TPCG shall at that time and place publically open the bids and read them aloud.

4. Proper Preparation and Submission of Bids

- a. Bids to be submitted by the time and at place indicated in the **"Invitation to Bidders"** and shall be enclosed in an addressed, sealed and labeled envelope, or submitted electronically.
- b. Envelope shall include Project Title and Name and Address of the Bidder.
- c. Each Bid Proposal packet shall include:
 - i. Completed Bid Form.

- ii. Signature Authorization with Written Evidence of Authority.
- iii. Bid Bond with Power of Attorney, or Certified Check or Cashier's Check, all in the amount of 5% of the total amount of the bid.
- iv. Completed Unit Price Form.

5. Bid Completeness Requirements – *including, but not limited to, the following:*

- a. Acknowledgement of Addenda on Bid Form.
- b. Fill in the Bid Amount for each item in the project.
- c. Bidder information.
- d. Sign and Attest the bid.

6. Project Addenda

- a. Clarifications in response to questions concerning Contract Documents will be included in upcoming addenda.
- b. Send all questions to BidQuestions@gisy.com. Any questions submitted outside of this provided email address will not be considered. The deadline to submit questions will be **Wednesday, July 29, 2026, at 5:00 P.M.**
Please make sure to include the project name in the Subject Line of the email.
- c. Addenda will be issued as soon as possible, no later than **Friday, July 31, 2026, at 3:00 P.M.** Addenda will be available at www.centralbidding.com by clicking on the Project Link and will also be sent via email provided on the sign-in sheet for this meeting.

7. Contract Documents and Requirements

- a. Listed in Section F – Standard Form of Agreement: Article 8 Contract Documents

8. General Project Information:

- a. Contract Time: 150 Calendar Days from Notice to Proceed
- b. Estimated Project Budget: \$1,980,000.00
- c. Contractor's License: *Heavy Construction and/or Highway, Street, and Bridge Construction*
- d. Liquidated Damages: In accordance with Section F, Agreement, Article 3
- e. Contractor's Liability Insurance: Refer to Section I – General Conditions, Section 5.4.
- f. There will be mandatory monthly progress meetings with Engineer, *Program Manager* and Owner personnel during the installation and construction phases of this project.

9. Construction Sequence and Means and Methods

- a. Responsibility of the Contractor.
- b. Contractor to submit project schedule within ten (10) days of the Effective Date of the Agreement for Owner/Engineer Review and Approval.
- c. Construction coordination with other contractors will be required.

10. Agency/Owner Comment

TPCG Pollution Control:

- *There are 2 valves located within Section 3 that or not to be damaged or removed and flowing must not be restricted.*
- *Please be aware that there will be other haul trucks using the landfill road.*

11. Project Contact Information

GIS Engineering, LLC

985-219-1000

Dwayne Veillon

Project Manager

Keven Keiser, P.E.

Project Engineer

Brian "BJ" Robichaux/Justin Besson

Construction Manager

Ann Schouest

Project Associate



ENGINEERING LLC

Terrebonne Parish Consolidated Government
South Plant Oxidation Pond Cell No. 2 Levee Repairs
(Hurricane Ida)
Pre-Bid Meeting Sign-in Sheet



July 22, 2026
2:00 P.M.

ATTENDANCE REGISTER

NAME	COMPANY NAME	PHYSICAL ADDRESS	TELEPHONE NUMBER	EMAIL ADDRESS
1 Mitchell W. Black	Besco Construction, LLC	12022 North Rd ERATH, LA 70573	985-351-8325	mitchell@Bescoconstruct.com
2 Bruce D. Martin	Royal		985-590-8892	bdmartin@Royal.us
3 Brent Rodriguez	CA Contracting East LLC		985-446-2212	biddlerodriguez-cont.com
4 James Ireland	Oswell Services		504-667-5452	james@oswell-services.com
5 Tyler Bergeron	TD CONSTRUCTION GROUP	1555 ST PATRICK ST THIBODAUX	985-227-4080	tyler@tdconstructiongroup.com
6 Paul Arnnemann	Slats Lucas Aggregates		985-805-1884	paularnemann@slatslucasagg.com
7 Kevin Porfait	Dupre Bros. Const.	114 Dickson Rd. Houma, LA	985-879-4440	kevin@duprebros.com
8 Todd Roberts	ERS, INC.		601-954-2257	ERSW@EARTHLINK.NET
9 Brian Boquet	TPCG		985-873-6727	bboquet@tpcg.org
10 Traci Eschette	Onshore Materials	127 Lincoln Lane Thib., LA 70301	985-232-5916	traci@onshoreco.com

	NAME	COMPANY NAME	PHYSICAL ADDRESS	TELEPHONE NUMBER	EMAIL ADDRESS
11	Jamie Branch	TPCG	2000 Saint Louis canal	873-6884	jbranch@TPCG.org
12	Kevan Keiser	GIS	197 Elysian Drive Houma, LA 70303	985-219-1000	kkeiser@gisy.com
13	Ann Schouest	GIS	197 Elysian Drive Houma, LA 70303	985-219-1000	aschouest@gisy.com
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					

PART III - ATTACHMENTS

Revised Section C – Uniform Public Works Bid Form

SECTION C
LOUISIANA UNIFORM PUBLIC WORK BID FORM

TO: Terrebonne Parish Consolidated Government
City of Houma Service Complex
301 Plant Road
Houma, LA 70363
(Owner to provide name and address of owner)

BID FOR: South Plant Oxidation Pond
Cell No. 2 Levee Repairs
(Hurricane Francine)
TPCG No. FRA-0006 FEMA No. 815690
(Owner to provide name of project and other identifying information)

The undersigned bidder hereby declares and represents that she/he; a) has carefully examined and understands the Bidding Documents, b) has not received, relied on, or based his bid on any verbal instructions contrary to the Bidding Documents or any addenda, c) has personally inspected and is familiar with the project site, and hereby proposes to provide all labor, materials, tools, appliances and facilities as required to perform, in a workmanlike manner, all work and services for the construction and completion of the referenced project, all in strict accordance with the Bidding Documents prepared by: **GIS Engineering, LLC** and dated: **June 2026**

(Owner to provide name of entity preparing bidding documents.)

Bidders must acknowledge all addenda. The Bidder acknowledges receipt of the following **ADDENDA:** (Enter the number the Designer has assigned to each of the addenda that the Bidder is acknowledging) _____

TOTAL BASE BID: For all work required by the Bidding Documents (including any and all unit prices designated "Base Bid" * but not alternates) the sum of:

_____ Dollars (\$ _____)

ALTERNATES: For any and all work required by the Bidding Documents for Alternates including any and all unit prices designated as alternates in the unit price description.

Alternate No. 1 *(Owner to provide description of alternate and state whether add or deduct)* for the lump sum of:

_____ N/A _____ Dollars (\$ _____ N/A _____)

Alternate No. 2 *(Owner to provide description of alternate and state whether add or deduct)* for the lump sum of:

_____ N/A _____ Dollars (\$ _____ N/A _____)

Alternate No. 3 *(Owner to provide description of alternate and state whether add or deduct)* for the lump sum of:

_____ N/A _____ Dollars (\$ _____ N/A _____)

NAME OF BIDDER: _____

ADDRESS OF BIDDER: _____

LOUISIANA CONTRACTOR'S LICENSE NUMBER: _____

NAME OF AUTHORIZED SIGNATORY OF BIDDER: _____

TITLE OF AUTHORIZED SIGNATORY OF BIDDER: _____

SIGNATURE OF AUTHORIZED SIGNATORY OF BIDDER **: _____

DATE: _____

THE FOLLOWING ITEMS ARE TO BE INCLUDED WITH THE SUBMISSION OF THIS LOUISIANA UNIFORM PUBLIC WORK BID FORM:

* The Unit Price Form shall be used if the contract includes unit prices. Otherwise it is not required and need not be included with the form. The number of unit prices that may be included is not limited and additional sheets may be included if needed.

** **A CORPORATE RESOLUTION OR WRITTEN EVIDENCE** of the authority of the person signing the bid for the public work as prescribed by LA R.S. 38:2212(B)(5).

BID SECURITY in the form of a bid bond, certified check or cashier's check as prescribed by LA RS 38:2218(A) attached to and made a part of this bid.

SECTION C
LOUISIANA UNIFORM PUBLIC WORK BID FORM
UNIT PRICE FORM

TO: Terrebonne Parish Consolidated Government
City of Houma Service Complex
301 Plant Road
Houma, LA 70363
(Owner to provide name and address of owner)

BID FOR: South Plant Oxidation Pond
Cell No. 2 Levee Repairs
Hurricane Francine)
TPCG No. FRA-0006 FEMA No. 815690
(Owner to provide name of project and other identifying information)

UNIT PRICES: This form shall be used for any and all work required by the Bidding Documents and described as unit prices. Amounts shall be stated in figures and only in figures.

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Mobilization & Demobilization		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
01	1	Lump Sum		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Construction Layout		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
02	1	Lump Sum		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Removal of Structures and Obstructions		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
03	1	Lump Sum		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Levee Embankment (Hauling, Placing, & Compacting)		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
04	1,505	Cubic Yards		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Seeding		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
05	2	Acres		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Rip Rap		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
06	11,455	Tons		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Geotextile Fabric (Class D)		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
07	10,155	Square Yard		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Articulated Concrete Mats		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
08	36,800	Square Foot		

DESCRIPTION:	☒ Base Bid or ☐ Alt.# ____	Access Road Maintenance Aggregate (610 Limestone)		
REF. NO.	QUANTITY:	UNIT OF MEASURE:	UNIT PRICE	UNIT PRICE EXTENSION <i>(Quantity times Unit Price)</i>
09	1,020	Tons		

Wordings for "DESCRIPTION" is to be provided by the Owner.

All quantities are estimated. The contractor will be paid based upon actual quantities as verified by the Owner

PART III - ATTACHMENTS

Revised Plan Sheets

SEGMENT 1 EARTHEN EMBANKMENT VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
0+10.110	2.58	0.00	0.00
0+50.000	2.23	3.55	3.55
1+00.000	1.66	3.61	7.16
1+50.000	1.11	2.57	9.73
2+00.000	1.51	2.43	12.16
2+50.000	2.07	3.32	15.48
3+00.000	3.14	4.83	20.31
3+50.000	3.26	5.93	26.24
4+00.000	3.18	5.96	32.20
4+50.000	2.86	5.58	37.78
5+00.000	3.60	5.98	43.76
5+50.000	3.68	6.75	50.51
6+00.000	2.56	5.77	56.28
6+50.000	2.08	4.30	60.58
7+00.000	0.98	2.84	63.42
7+50.000	1.87	2.65	66.07
8+00.000	1.56	3.18	69.24
8+50.000	1.52	2.85	72.10
9+00.000	2.37	3.62	75.72
9+50.000	2.10	4.13	79.85
10+00.000	0.10	2.04	81.89
10+50.000	0.27	0.35	82.24
11+00.000	0.55	0.76	83.00
11+50.000	2.34	2.68	85.68
12+00.000	3.12	5.05	90.73
12+50.000	2.41	5.13	95.87
13+00.000	1.08	3.24	99.11
13+50.000	1.39	2.31	101.42
14+00.000	1.76	2.91	104.33
14+50.000	1.03	2.59	106.92
15+25.000	0.00	1.43	108.35

SEGMENT 1 RIPRAP VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
0+10.110	37.00	0.00	0.00
0+50.000	36.69	54.44	54.44
1+00.000	35.91	67.22	121.66
1+50.000	37.12	67.61	189.27
2+00.000	35.03	66.81	256.08
2+50.000	35.34	65.16	321.24
3+00.000	35.75	65.83	387.07
3+50.000	36.64	66.67	453.74
4+00.000	38.16	69.26	523.00
4+50.000	37.20	71.44	594.44
5+00.000	37.20	68.89	663.33
5+50.000	37.27	67.71	731.03
6+00.000	35.73	67.59	798.63
6+50.000	36.32	65.62	864.25
7+00.000	35.15	66.18	930.42
7+50.000	36.32	64.41	994.83
8+00.000	36.40	67.33	1062.17
8+50.000	36.40	67.41	1129.58
9+00.000	36.90	62.65	1192.23
9+50.000	36.99	69.75	1261.98
10+00.000	36.97	68.48	1330.46
10+50.000	36.92	80.32	1410.78
11+00.000	37.00	67.58	1478.37
11+50.000	36.90	67.39	1545.75
12+00.000	37.00	68.43	1614.18
12+50.000	36.91	65.98	1680.16
13+00.000	36.92	66.72	1746.88
13+50.000	36.26	64.37	1811.26
14+00.000	37.04	67.87	1879.12
14+50.000	39.97	70.53	1949.66
15+25.000	0.00	34.55	1984.21

SEGMENT 2 610 LIMESTONE VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
14+50.000	0.00	0.00	0.00
15+25.000	0.79	1.06	1.06
15+50.000	3.46	1.97	3.02
16+00.000	3.97	6.88	9.90
16+50.000	3.60	7.01	16.91
17+00.000	3.54	6.62	23.53
17+50.000	3.13	6.18	29.71
18+00.000	3.69	6.32	36.02
18+50.000	5.12	8.15	44.18
19+00.000	5.32	9.66	53.84
19+50.000	6.23	10.69	64.53
20+00.000	5.98	11.30	75.83
20+50.000	5.30	10.45	86.28
21+00.000	7.27	11.64	97.91
21+50.000	8.15	14.28	112.19
22+00.000	7.78	14.75	126.94
22+50.000	7.05	13.74	140.68
23+00.000	5.93	12.02	152.70
23+50.000	5.00	10.12	162.82
24+00.000	5.39	9.61	172.43
24+50.000	6.15	10.68	183.11
25+00.000	4.53	9.88	192.99
25+50.000	4.31	8.19	201.18
26+00.000	8.77	12.14	213.32
26+50.000	8.71	16.18	229.50
27+00.000	10.87	18.13	247.64
27+50.000	11.45	20.67	268.30
28+00.000	6.80	16.84	285.15
28+50.000	6.56	12.37	297.51
29+00.000	6.62	12.20	309.72
29+50.000	6.86	12.48	322.20
30+00.000	7.20	13.02	335.22
30+50.000	8.35	14.40	349.62
31+00.000	9.05	16.12	365.74
31+50.000	10.08	17.82	383.56
32+00.000	7.53	16.30	399.86
32+50.000	6.96	13.42	413.28
33+00.000	12.12	17.64	430.92

SEGMENT 2 EARTHEN EMBANKMENT BELOW MATS VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
14+00.000	0.00	0.00	0.00
14+50.000	1.16	1.05	1.05
15+25.000	0.39	0.94	2.00
15+50.000	1.81	1.02	3.01
16+00.000	5.14	6.43	9.44
16+50.000	12.85	16.66	26.10
17+00.000	15.37	26.13	52.24
17+50.000	17.65	30.58	82.81
18+00.000	22.67	37.33	120.14
18+50.000	27.06	46.05	166.19
19+00.000	23.21	46.55	212.74
19+50.000	20.76	40.71	253.46
20+00.000	18.36	36.22	289.67
20+50.000	16.13	31.93	321.60
21+00.000	14.35	28.22	349.82
21+50.000	14.13	26.37	376.19
22+00.000	13.47	25.55	401.74
22+50.000	14.30	25.71	427.45
23+00.000	16.90	28.89	456.34
23+50.000	20.48	34.61	490.95
24+00.000	21.93	39.61	530.55
24+50.000	19.28	38.16	568.71
25+00.000	20.85	37.16	605.87
25+50.000	20.68	38.46	644.33
26+00.000	13.03	30.85	675.18
26+50.000	14.90	25.86	701.05
27+00.000	11.26	24.22	725.27
27+50.000	10.78	20.40	745.67
28+00.000	18.60	27.52	773.19
28+50.000	19.45	35.23	808.42
29+00.000	23.40	39.67	848.09
29+50.000	27.14	46.79	894.88
30+00.000	29.73	52.66	947.54
30+50.000	29.26	54.62	1002.16
31+00.000	22.01	47.47	1049.63
31+50.000	15.59	33.87	1083.50
32+00.000	17.41	30.56	1114.06
32+50.000	16.39	31.30	1145.36
33+00.000	0.00	15.50	1160.86

SEGMENT 3 610 LIMESTONE VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
33+00.000	12.12	0.00	0.00
33+50.000	20.52	30.22	30.22
34+00.000	7.47	25.92	56.14
34+50.000	6.97	13.38	69.52
35+00.000	6.46	12.43	81.95
35+50.000	7.74	13.15	95.10
36+00.000	6.26	12.97	108.07
36+50.000	6.45	11.77	119.84
37+00.000	6.68	12.16	132.00
37+50.000	6.08	11.82	143.82
38+00.000	6.77	11.90	155.72
38+50.000	7.81	13.50	169.22
39+00.000	6.61	13.35	182.57
39+50.000	6.07	11.74	194.31
40+00.000	4.87	10.13	204.44
40+50.000	4.49	8.68	213.12
41+00.000	5.51	9.26	222.38
41+50.000	4.43	9.21	231.59
42+00.000	5.46	9.16	240.75
42+50.000	4.89	9.57	250.32
43+00.000	3.17	7.46	257.78
43+50.000	1.62	4.44	262.22
44+00.000	3.84	5.06	267.28
44+50.000	3.82	7.09	274.37
45+00.000	1.61	5.02	279.39
45+50.000	0.82	2.25	281.64
46+00.000	2.37	2.95	284.59
46+25.000	3.24	2.59	287.18

SEGMENT 3 RIPRAP VOL. TABLE			
Station	Fill Area (Sq.ft.)	Fill Volume (Cu.yd.)	Cum. Fill Vol. (Cu.yd.)
33+00.000	0.00	0.00	0.00
33+50.000	29.59	27.40	27.40
34+00.000	29.78	54.97	82.37
34+50.000	31.96	53.89	136.26
35+00.000	37.09	63.93	200.19
35+50.000	37.00	69.75	269.94
36+00.000	37.00	68.52	338.46
36+50.000	37.00	68.52	406.98
37+00.000	37.00	68.52	475.50
37+50.000	37.00	68.52	544.02
38+00.000	37.05	68.57	612.59
38+50.000	37.04	68.60	681.19
39+00.000	37.00	68.56	749.75
39+50.000	37.00	68.52	818.27
40+00.000	37.00	68.52	886.79
40+50.000	37.01	67.88	954.67
41+00.000	37.01	68.53	1023.20
41+50.000	37.00	68.53	1091.73
42+00.000	37.00	68.52	1160.25
42+50.000	37.00	69.80	1230.05
43+00.000	37.00	68.52	1298.57
43+50.000	37.00	68.52	1367.09
44+00.000	37.01	67.28	1434.37
44+50.000	37.02	68.54	1502.91
45+00.000	37.01	68.54	1571.45
45+50.000	37.12	68.64	1640.09
46+00.000	38.21	68.55	1708.64
46+25.000	34.32	33.58	1742.22

SEGMENT 4 EARTHEN EMBANKMENT VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
60+05.000	2.55	0.00	0.00
60+50.000	4.00	5.46	5.46
61+00.000	5.90	9.19	14.64
61+50.000	4.52	9.64	24.29
62+00.000	3.45	7.37	31.66
62+50.000	3.43	6.36	38.02
63+00.000	2.64	5.62	43.64
63+50.000	2.30	4.57	48.21
64+00.000	2.29	4.25	52.45
64+50.000	2.46	4.40	56.85
65+00.000	2.42	4.52	61.37
65+50.000	3.33	5.33	66.69
66+00.000	3.50	6.32	73.02
66+50.000	3.68	6.65	79.67
67+00.000	3.80	6.93	86.59
67+50.000	5.02	8.16	94.76
68+00.000	8.41	12.49	107.24
68+50.000	5.24	12.64	119.88
69+00.000	2.61	7.26	127.14
69+50.000	6.26	8.22	135.36
70+00.000	7.97	13.28	148.65
70+50.000	9.59	17.11	165.75
71+00.000	9.16	18.08	183.83
71+50.000	7.53	15.45	199.28
72+00.000	7.16	13.62	212.90
72+50.000	6.11	12.28	225.18
73+00.000	4.64	9.95	235.14

SEGMENT 4 RIPRAP VOL. TABLE			
STATION	FILL AREA (SQ.FT.)	FILL VOLUME (CU.YD.)	CUM. FILL VOL. (CU.YD.)
60+05.000	36.50	0.00	0.00
60+50.000	36.50	60.83	60.83
61+00.000	36.53	66.73	127.56
61+50.000	36.50	67.62	195.18
62+00.000	36.50	67.59	262.78
62+50.000	36.50	68.65	331.42
63+00.000	36.50	66.93	398.36
63+50.000	36.50	67.60	465.95
64+00.000	36.53	66.52	532.47
64+50.000	36.50	67.98	600.46
65+00.000	36.50	68.40	668.85
65+50.000	36.50	68.00	736.85
66+00.000	36.50	67.60	804.45
66+50.000	36.50	67.59	872.04
67+00.000	36.50	67.59	939.63
67+50.000	36.50	67.94	1007.57
68+00.000	36.53	66.29	1073.86
68+50.000	36.50	67.62	1141.48
69+00.000	36.50	68.22	1209.70
69+50.000	36.50	67.21	1276.91
70+00.000	36.58	65.82	1342.73
70+50.000	42.92	58.37	1401.10
71+00.000	38.10	62.22	1463.32
71+50.000	36.50	69.07	1532.39
72+00.000	36.50	67.14	1599.53
72+50.000	36.50	67.59	1667.12
73+00.000	36.94	68.00	1735.12

PLAN

40' 0' 40' 80' 120'



The plan view shows a horizontal bridge structure divided into segments. From left to right, the segments are: a 40-foot black segment, a 40-foot white segment, a 40-foot black segment, and a 40-foot white segment. The total length is 160 feet. The labels 40', 0', 40', 80', and 120' are positioned above the segments, indicating cumulative distances from the left end.



HORIZONTAL SCALE

 - EXISTING GROUND
 - PROPOSED EARTHEN EMBANKMENT
 - PROPOSED RIP RAP (130LB CLASS)
 - PROPOSED 610 LIMESTONE FILL
 - PROPOSED CLEARING AND GRUBBING
 - PROPOSED CONCRETE MAT

[illegible]

THIS DRAWING HAS
BEEN REDUCED TO
ONE HALF SIZE













THIS DOCUMENT IS THE PROPERTY OF GRAND ISLE
SHIP YARD ("GISY"). IT IS TO BE USED ONLY IN
CONNECTION WITH WORK BEING PERFORMED BY
GISY OR THE APPROVED CONTRACTOR.
REPRODUCTION IN WHOLE OR IN PART FOR ANY
PURPOSE OTHER THAN WORK PERFORMED BY
GISY OR THE APPROVED CONTRACTOR IS
FORBIDDEN EXCEPT BY EXPRESS WRITTEN
PERMISSION OF GISY. IT IS TO BE SAFEGUARDED
AGAINST BOTH DELIBERATE AND INADVERTENT
DISCLOSURE TO ANY THIRD PARTY.

**TERREBONNE PARISH
CONSOLIDATED GOVERNMENT**

**SOUTH PLANT OXIDATION POND
CELL NO. 2 LEVEE REPAIRS
(HURRICANE FRANCINE)**

SEGMENTS 2 & 3
LEVEE REHAB
PLAN AND
PROFILES (4 OF 5)


Project number	39130-1683
Date	JUNE 2026
Designed by	KDK
Drawn by	MRJ, MAC
Checked by	DV
Checked by	MAC
Plot Date	July 21, 2026

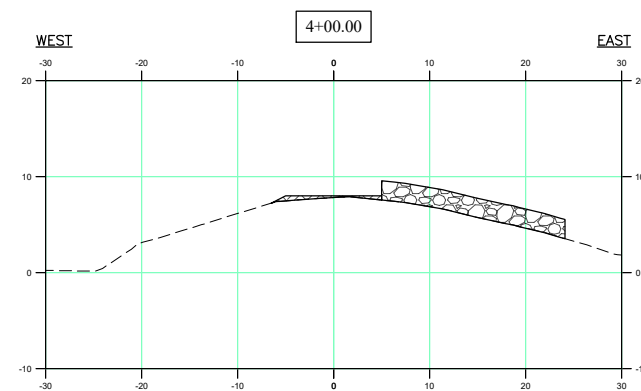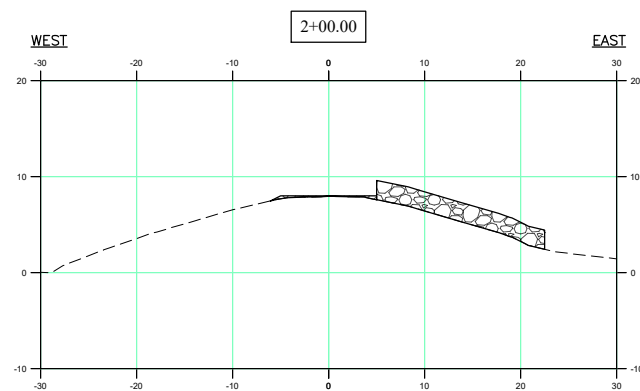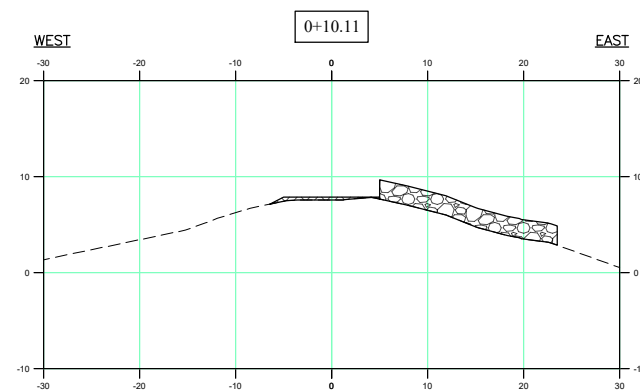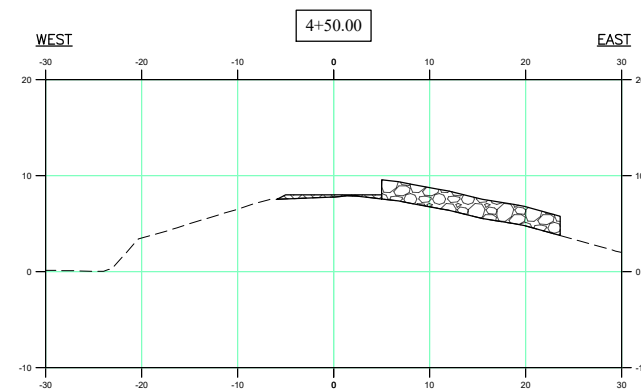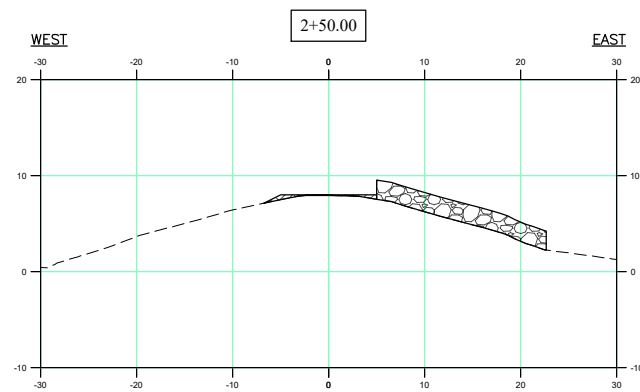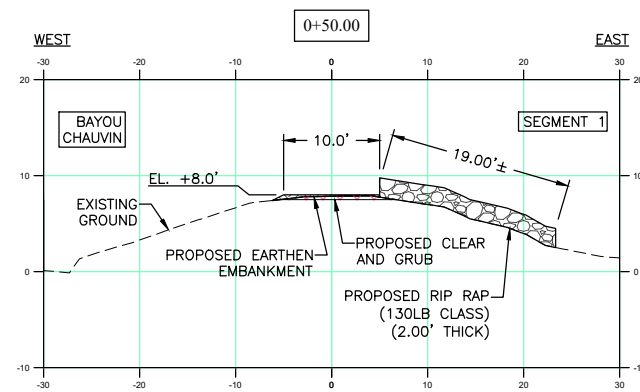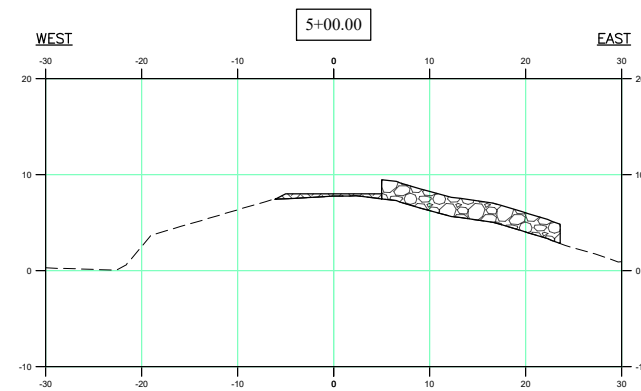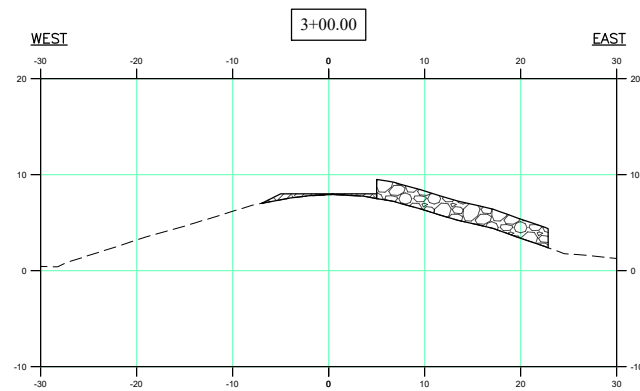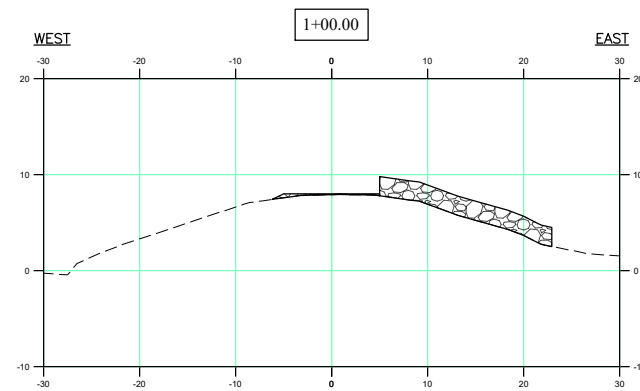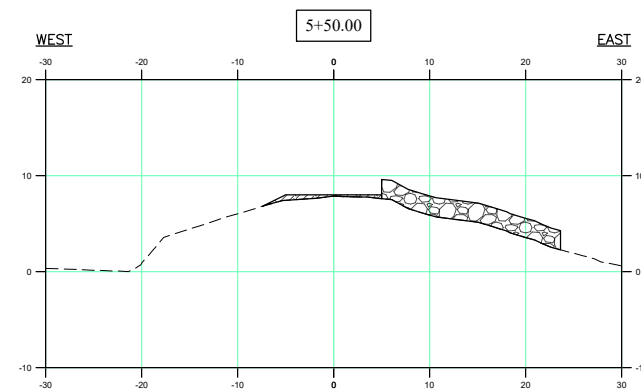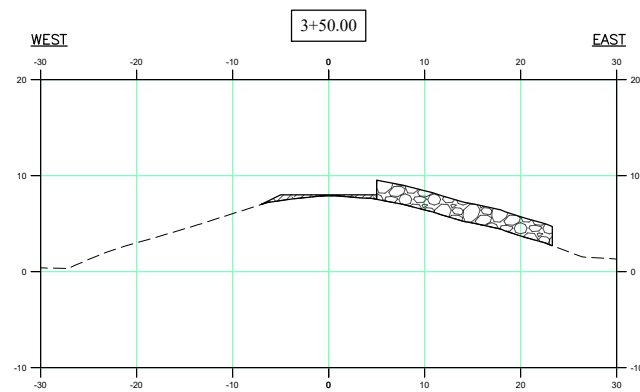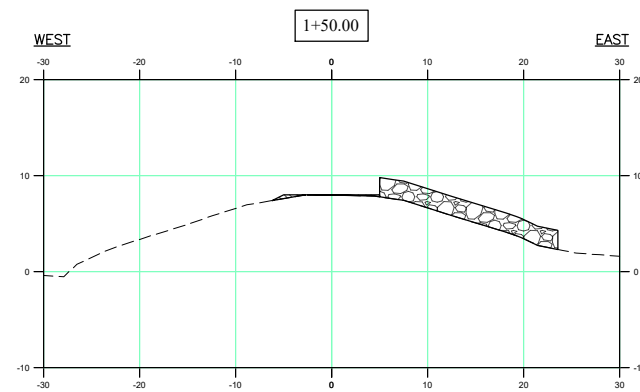

LEGEND

 - EXISTING GROUND
 - PROPOSED EARTHEN EMBANKMENT
 - PROPOSED RIP RAP (130LB CLASS)
 - PROPOSED 610 LIMESTONE FILL
 - PROPOSED CLEARING AND GRUBBING
 - CONCRETE MATS

NOTE: SEGMENT 1 DESIGN IS TYPICAL FROM
STA. 0+10.00 THRU STA. 14+85.28
(SEE SHEET 05)



NOTE: THE CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE PROJECT SITE PRIOR TO BIDDING THE WORK. THE TYPICAL WATER SURFACE ELEVATIONS WERE NOT SURVEYED. WATER SURFACE ELEVATIONS INSIDE CELL #2 WERE CONSISTENTLY HIGHER THEN IN THE SURROUNDING BAYOUS. THE BAYOUS ARE TIDALLY INFLUENCED AND WILL LIKELY DIFFER IN ELEVATIONS MORE THEN CELLS #1, #2, AND #3.

**ENGINEERING LLC**

Coastal Design & Infrastructure
197 Elysian Drive
Houma, Louisiana 70363
Phone: 985.219.1000

ENGINEERING • PLANNING • ENVIRONMENTAL CONSULTING

[illegible]

THIS DRAWING HAS
BEEN REDUCED TO
ONE HALF SIZE













THIS DOCUMENT IS THE PROPERTY OF GRAND ISLE
SHIP YARD ("GISY"). IT IS TO BE USED ONLY IN
CONNECTION WITH WORK BEING PERFORMED BY
GISY OR THE APPROVED CONTRACTOR.
REPRODUCTION IN WHOLE OR IN PART FOR ANY
PURPOSE OTHER THAN WORK PERFORMED BY
GISY OR THE APPROVED CONTRACTOR IS
FORBIDDEN EXCEPT BY EXPRESS WRITTEN
PERMISSION OF GISY. IT IS TO BE SAFEGUARDED
AGAINST BOTH DELIBERATE AND INADVERTENT
DISCLOSURE TO ANY THIRD PARTY.

**TERREBONNE PARISH
CONSOLIDATED GOVERNMENT**

**SOUTH PLANT OXIDATION POND
CELL NO. 2 LEVEE REPAIRS
(HURRICANE FRANCINE)**


SEGMENT 1
LEVEE REHAB
PROPOSED SECTIONS
(1 OF 8)

Project number	39130-1683
Date	JUNE 2026
Designed by	KDK
Drawn by	MRJ, MAC
Checked by	DV
Checked by	MAC
Plot Date	July 21, 2026

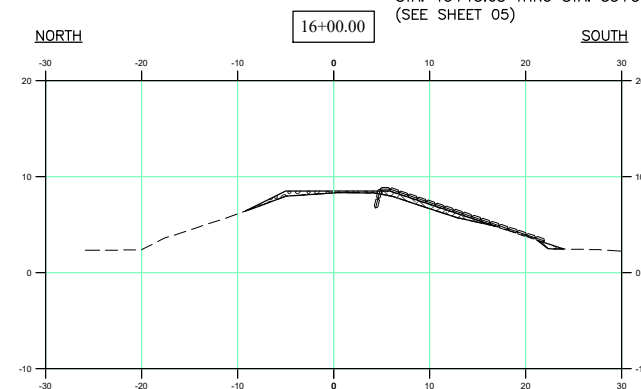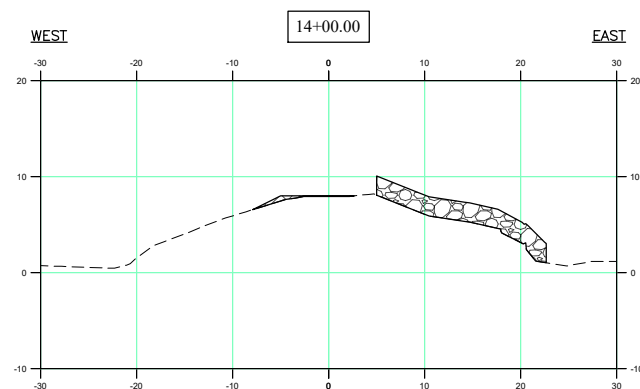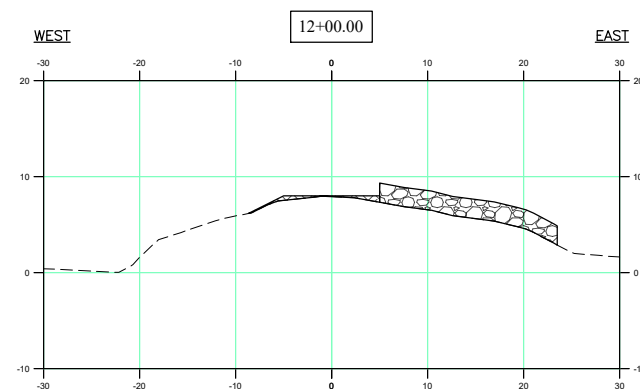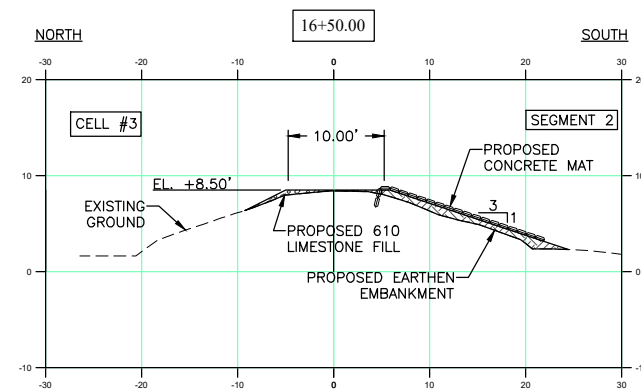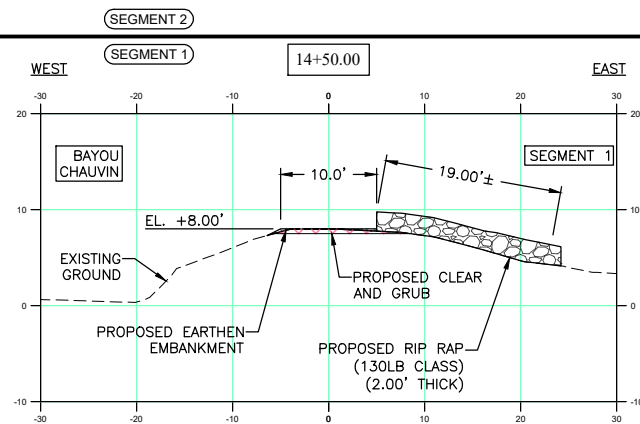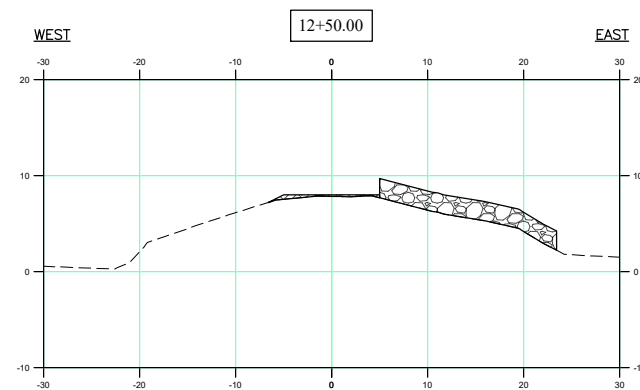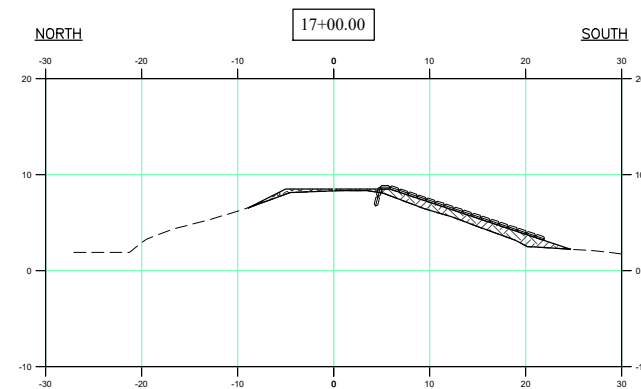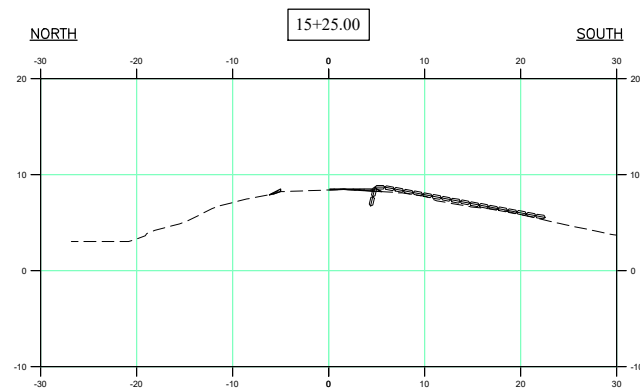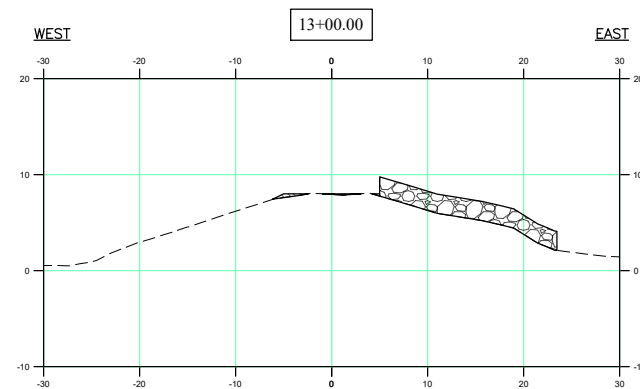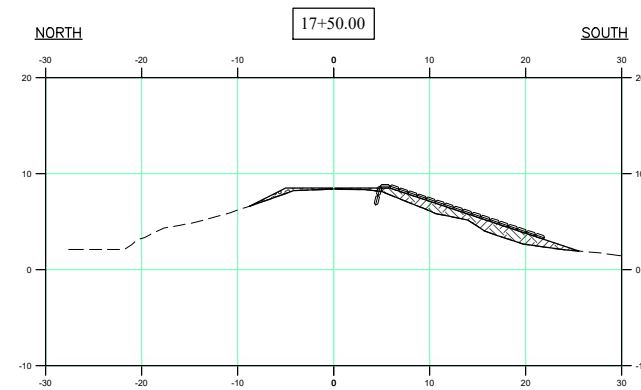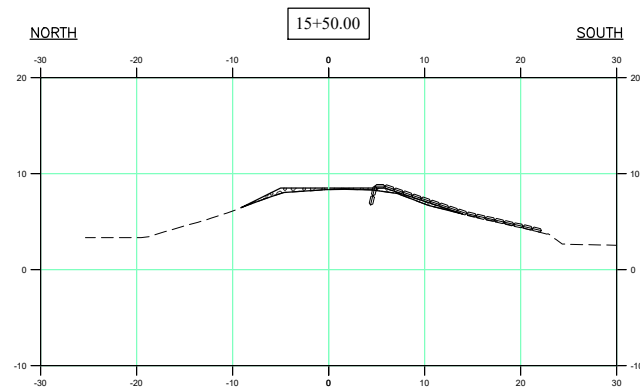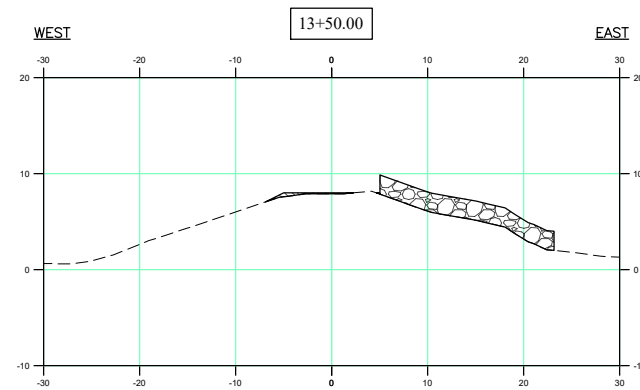

LEGEND

 - EXISTING GROUND
 - PROPOSED EARTHEN EMBANKMENT
 - PROPOSED RIP RAP (130LB CLASS)
 - PROPOSED 610 LIMESTONE FILL
 - PROPOSED CLEARING AND GRUBBING
 - CONCRETE MATS



NOTE: SEGMENT 2 DESIGN IS TYPICAL FROM
STA. 15+13.68 THRU STA. 33+53.54
(SEE SHEET 05)

NOTE: THE CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE PROJECT SITE PRIOR TO BIDDING THE WORK. THE TYPICAL WATER SURFACE ELEVATIONS WERE NOT SURVEYED. WATER SURFACE ELEVATIONS INSIDE CELL #2 WERE CONSISTENTLY HIGHER THEN IN THE SURROUNDING BAYOUS. THE BAYOUS ARE TIDALLY INFLUENCED AND WILL LIKELY DIFFER IN ELEVATIONS MORE THEN CELLS #1, #2, AND #3.

**ENGINEERING LLC**

Coastal Design & Infrastructure
197 Elysian Drive
Houma, Louisiana 70363
Phone: 985.219.1000

ENGINEERING • PLANNING • ENVIRONMENTAL CONSULTING

[illegible]

THIS DRAWING HAS
BEEN REDUCED TO
ONE HALF SIZE













THIS DOCUMENT IS THE PROPERTY OF GRAND ISLE
SHIP YARD ("GISY"). IT IS TO BE USED ONLY IN
CONNECTION WITH WORK BEING PERFORMED BY
GISY OR THE APPROVED CONTRACTOR.
REPRODUCTION IN WHOLE OR IN PART FOR ANY
PURPOSE OTHER THAN WORK PERFORMED BY
GISY OR THE APPROVED CONTRACTOR IS
FORBIDDEN EXCEPT BY EXPRESS WRITTEN
PERMISSION OF GISY. IT IS TO BE SAFEGUARDED
AGAINST BOTH DELIBERATE AND INADVERTENT
DISCLOSURE TO ANY THIRD PARTY.

**TERREBONNE PARISH
CONSOLIDATED GOVERNMENT**

**SOUTH PLANT OXIDATION POND
CELL NO. 2 LEVEE REPAIRS
(HURRICANE FRANCINE)**


SEGMENTS 1 & 2
LEVEE REHAB
PROPOSED SECTIONS
(3 OF 8)

Project number	39130-1683
Date	JUNE 2026
Designed by	KDK
Drawn by	MRJ, MAC
Checked by	DV
Checked by	MAC
Plot Date	July 21, 2026

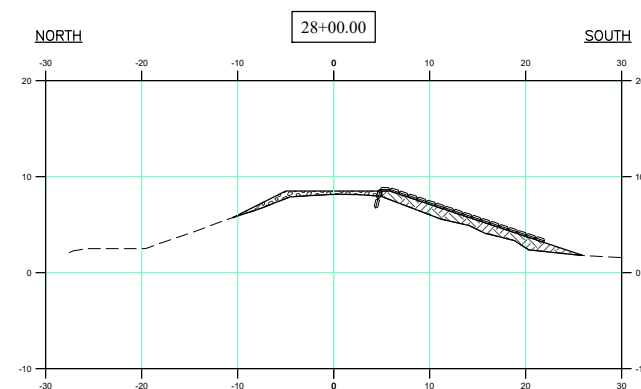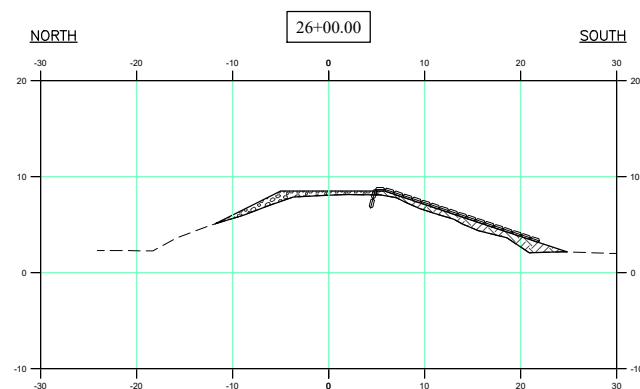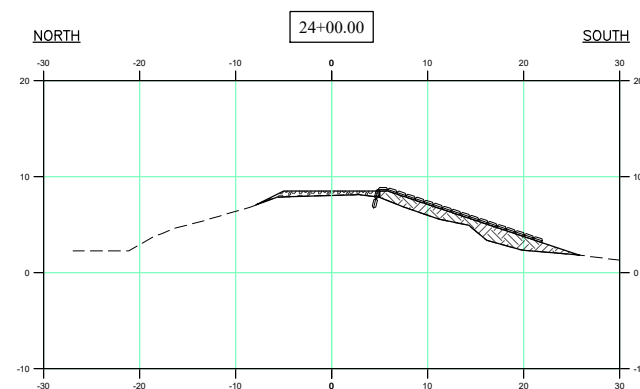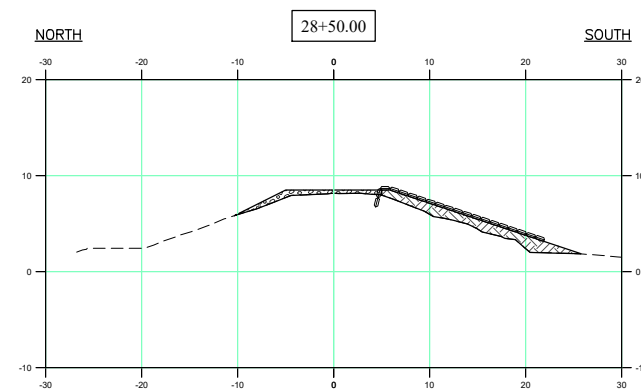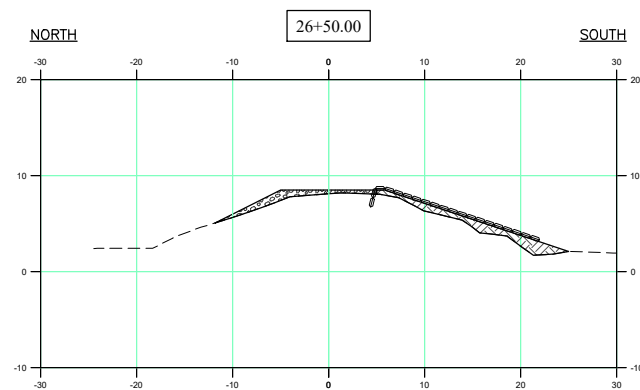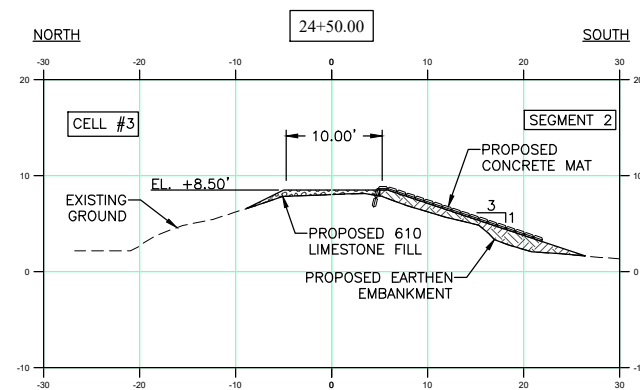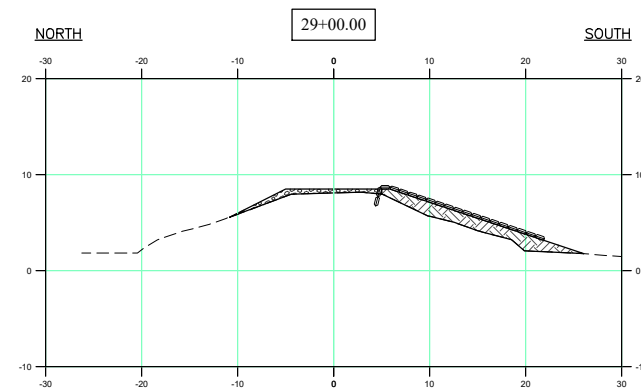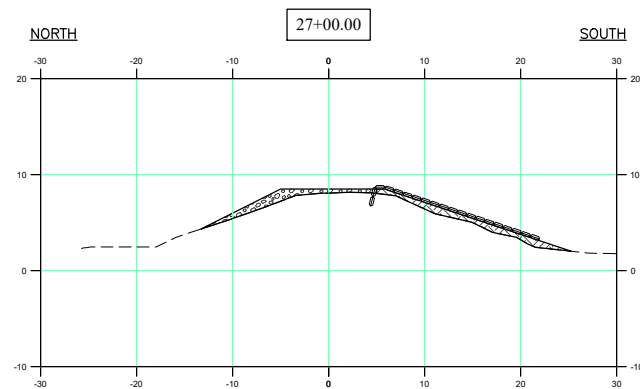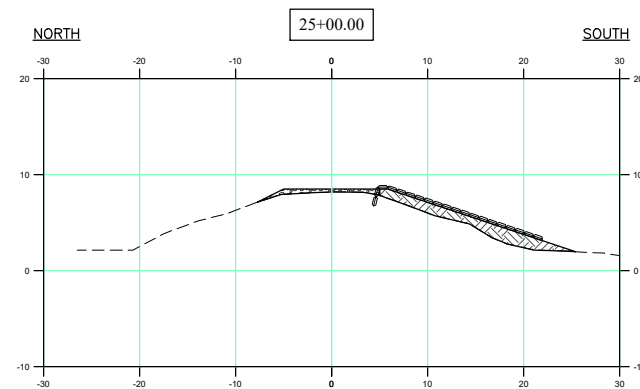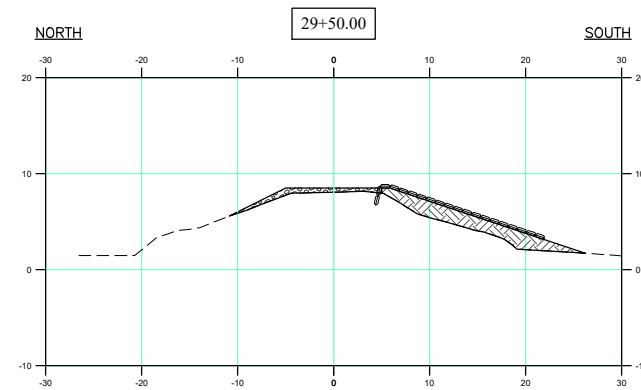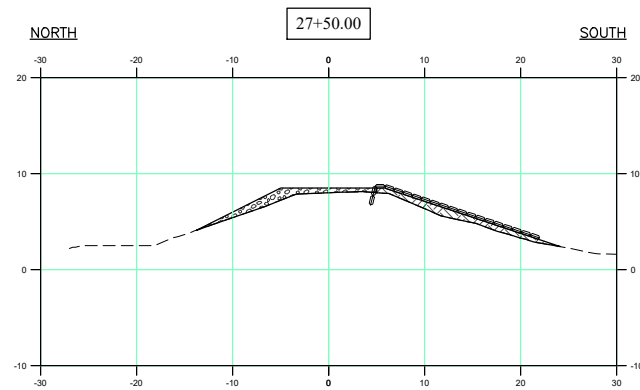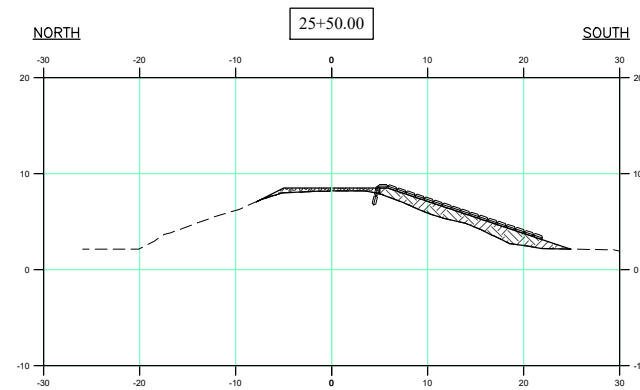

LEGEND

 - EXISTING GROUND
 - PROPOSED EARTHEN EMBANKMENT
 - PROPOSED RIP RAP (130LB CLASS)
 - PROPOSED 610 LIMESTONE FILL
 - PROPOSED CLEARING AND GRUBBING
 - CONCRETE MATS



NOTE: THE CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE PROJECT SITE PRIOR TO BIDDING THE WORK. THE TYPICAL WATER SURFACE ELEVATIONS WERE NOT SURVEYED. WATER SURFACE ELEVATIONS INSIDE CELL #2 WERE CONSISTENTLY HIGHER THEN IN THE SURROUNDING BAYOUS. THE BAYOUS ARE TIDALLY INFLUENCED AND WILL LIKELY DIFFER IN ELEVATIONS MORE THEN CELLS #1, #2, AND #3.

**ENGINEERING LLC**

Coastal Design & Infrastructure
197 Elysian Drive
Houma, Louisiana 70363
Phone: 865.219.1000

REVISIONS

[illegible]

THIS DRAWING HAS
BEEN REDUCED TO
ONE HALF SIZE













THIS DOCUMENT IS THE PROPERTY OF GRAND ISLE
SHIP YARD ("GISY"). IT IS TO BE USED ONLY IN
CONNECTION WITH WORK BEING PERFORMED BY
GISY OR THE APPROVED CONTRACTOR.
REPRODUCTION IN WHOLE OR IN PART FOR ANY
PURPOSE OTHER THAN WORK PERFORMED BY
GISY OR THE APPROVED CONTRACTOR IS
FORBIDDEN EXCEPT BY EXPRESS WRITTEN
PERMISSION OF GISY. IT IS TO BE SAFEGUARDED
AGAINST BOTH DELIBERATE AND INADVERTENT
DISCLOSURE TO ANY THIRD PARTY.

**TERREBONNE PARISH
CONSOLIDATED GOVERNMENT**


**SOUTH PLANT OXIDATION POND
CELL NO. 2 LEVEE REPAIRS
(HURRICANE FRANCINE)**

SEGMENT 2
LEVEE REHAB
PROPOSED SECTIONS
(5 OF 8)

Project number	39130-1683
Date	JUNE 2026
Designed by	KDK
Drawn by	MRJ, MAC
Checked by	DV
Checked by	MAC
Plot Date	July 21, 2026

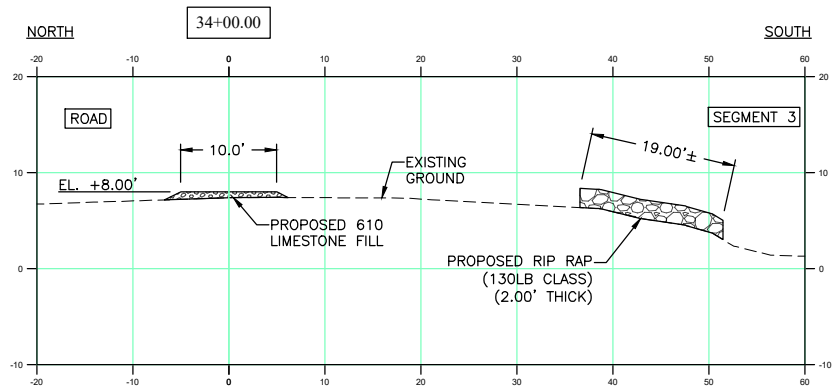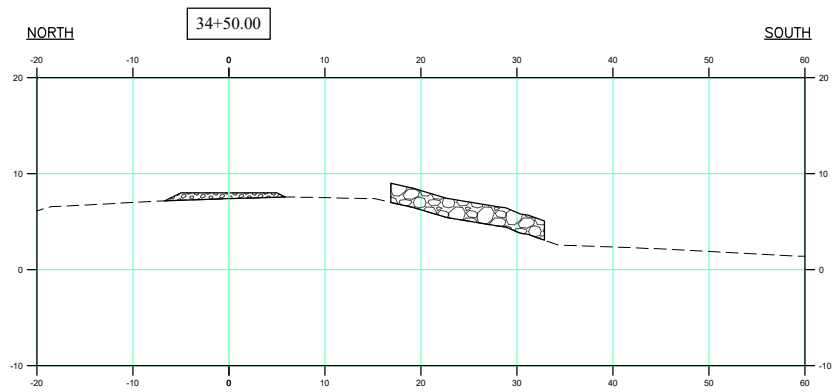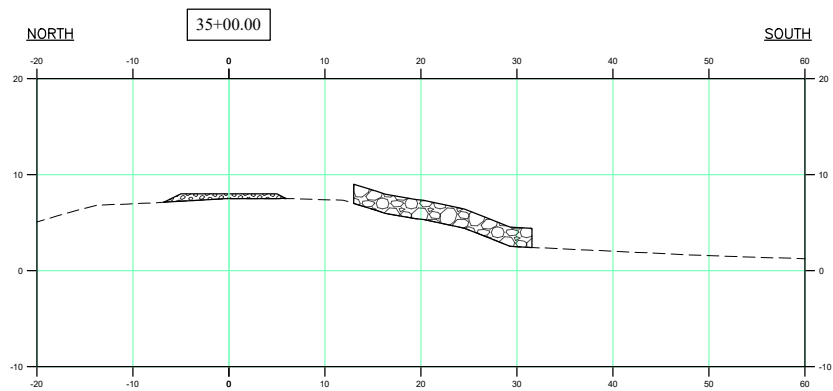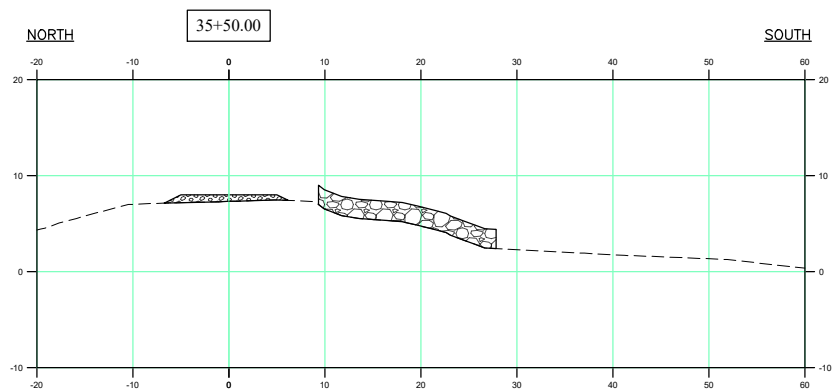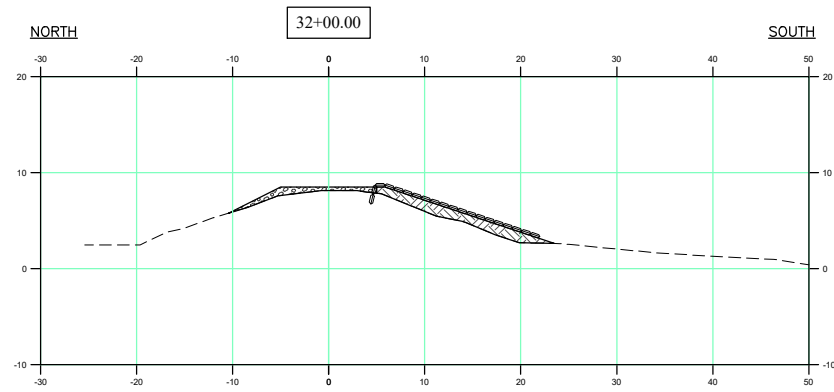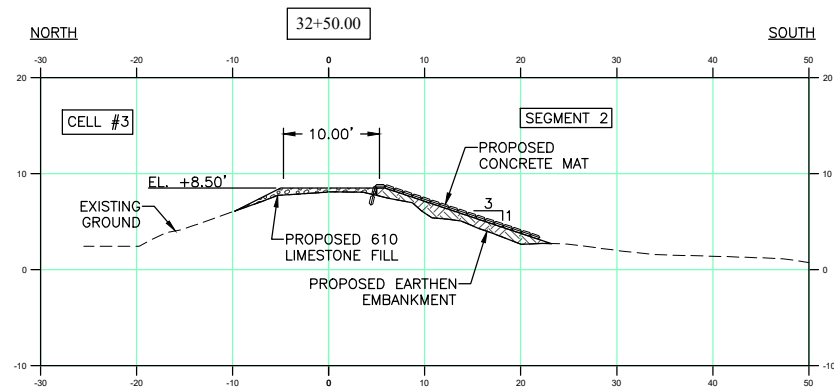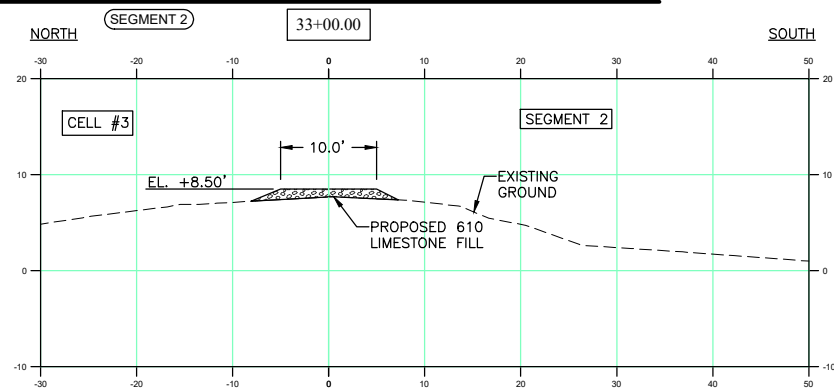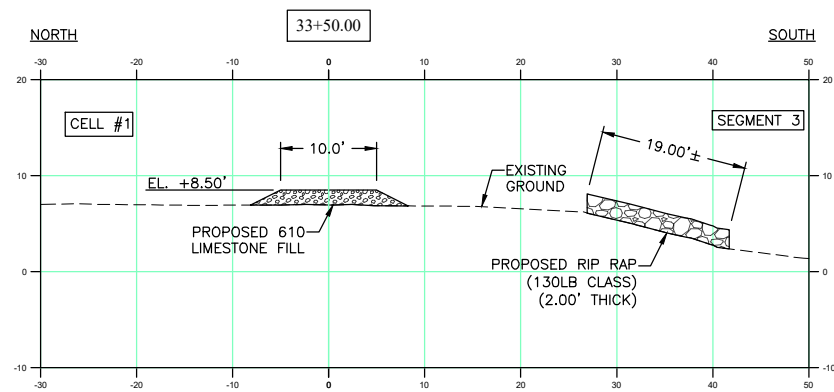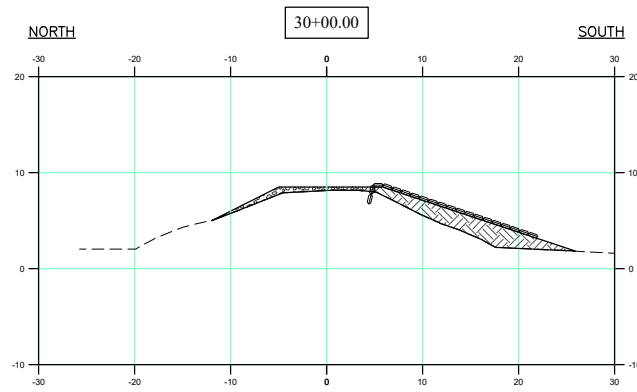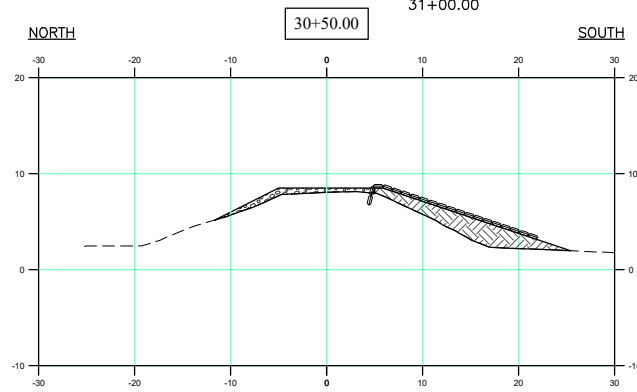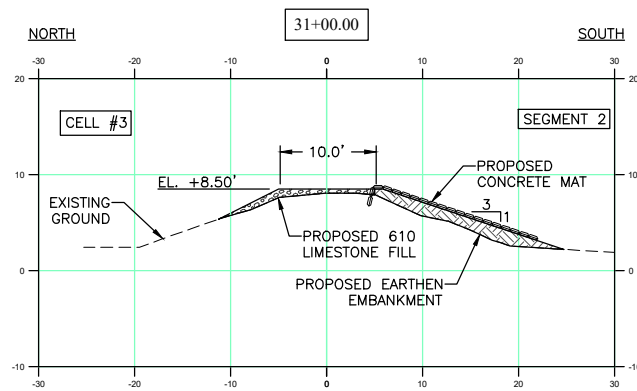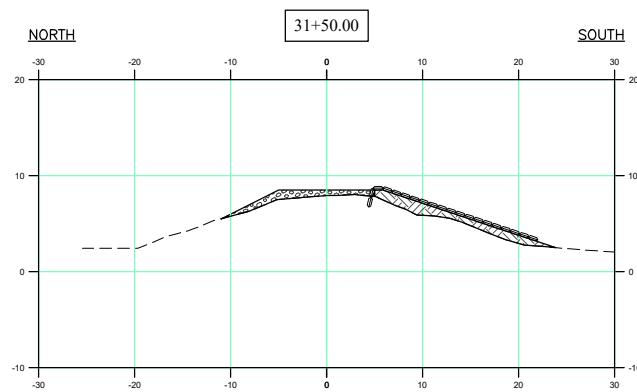

- LEGEND
- EXISTING GROUND
 - PROPOSED EARTHEN EMBANKMENT
 - PROPOSED RIP RAP (130LB CLASS)
 - PROPOSED 610 LIMESTONE FILL
 - PROPOSED CLEARING AND GRUBBING
 - CONCRETE MATS



NOTE: THE CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE PROJECT SITE PRIOR TO BIDDING THE WORK. THE TYPICAL WATER SURFACE ELEVATIONS WERE NOT SURVEYED. WATER SURFACE ELEVATIONS INSIDE CELL #2 WERE CONSISTENTLY HIGHER THEN IN THE SURROUNDING BAYOUS. THE BAYOUS ARE TIDALLY INFLUENCED AND WILL LIKELY DIFFER IN ELEVATIONS MORE THEN CELLS #1, #2, AND #3.

ENGINEERING LLC

Coastal Design & Infrastructure
107 Elysian Drive
Houma, Louisiana 70363
Phone: 985.219.1000













ENGINEERING • PLANNING • ENVIRONMENTAL CONSULTING

REVISIONS		
No.	Description	Date
A	ISSUED FOR BID	06/2026
B	ADDENDUM NO. 1	07/21/26

THIS DRAWING HAS BEEN REDUCED TO ONE HALF SIZE

THIS DOCUMENT IS THE PROPERTY OF GRAND ISLE SHIP YARD ("GISY"). IT IS TO BE USED ONLY IN CONNECTION WITH WORK BEING PERFORMED BY GISY OR THE APPROVED CONTRACTOR. REPRODUCTION IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN WORK PERFORMED BY GISY OR THE APPROVED CONTRACTOR IS FORBIDDEN EXCEPT BY EXPRESS WRITTEN PERMISSION OF GISY. IT IS TO BE SAFEGUARDED AGAINST BOTH DELIBERATE AND INADVERTENT DISCLOSURE TO ANY THIRD PARTY.

TERREBONNE PARISH CONSOLIDATED GOVERNMENT	
SOUTH PLANT OXIDATION POND CELL NO. 2 LEVEE REPAIRS (HURRICANE FRANCINE)	
SEGMENTS 2 & 3 LEVEE REHAB PROPOSED SECTIONS (6 OF 8)	
Project number	39130-1683
Date	JUNE 2026
Designed by	KDK
Drawn by	MRJ, MAC
Checked by	DV
Checked by	MAC
Plot Date	July 21, 2026

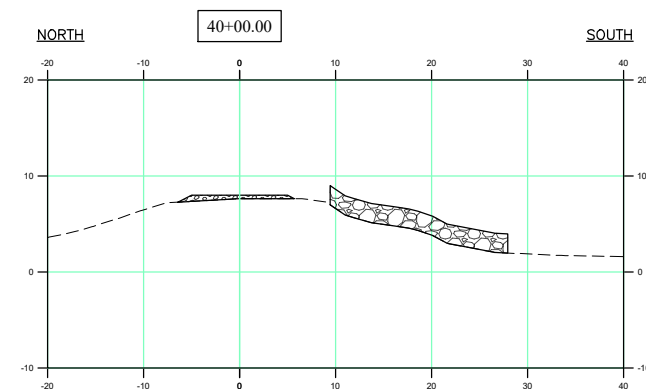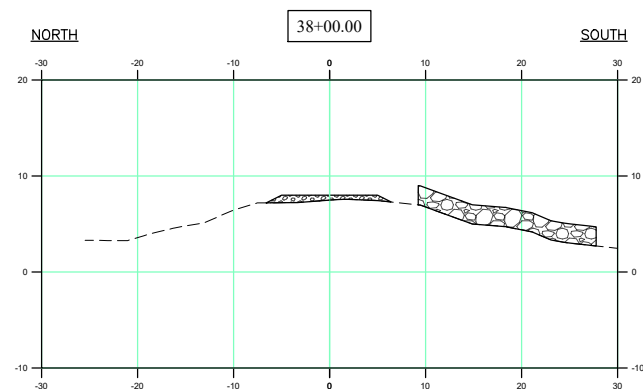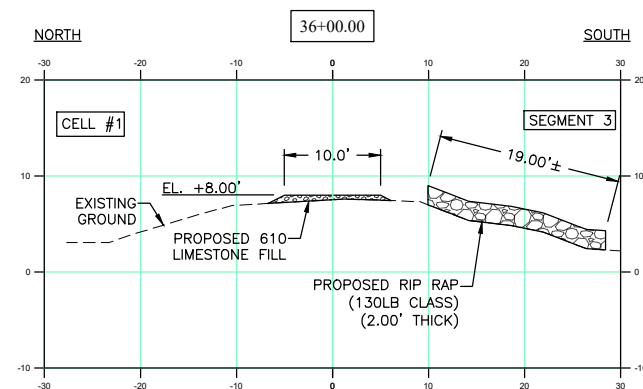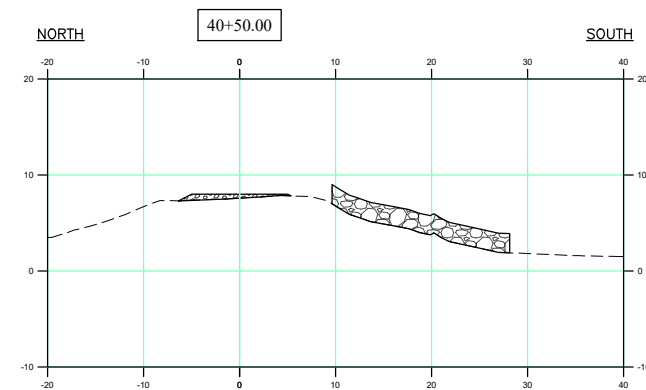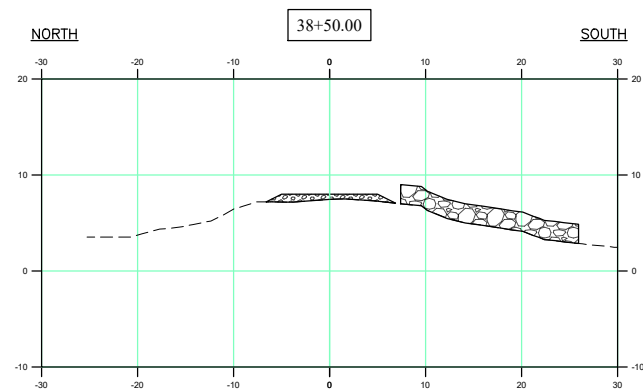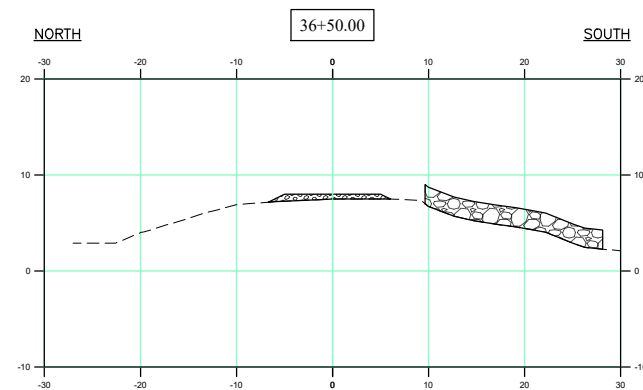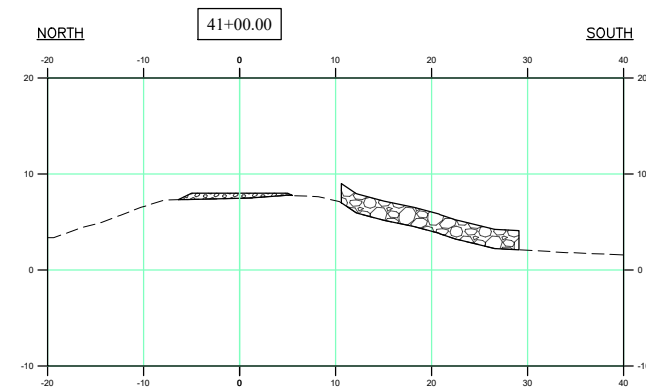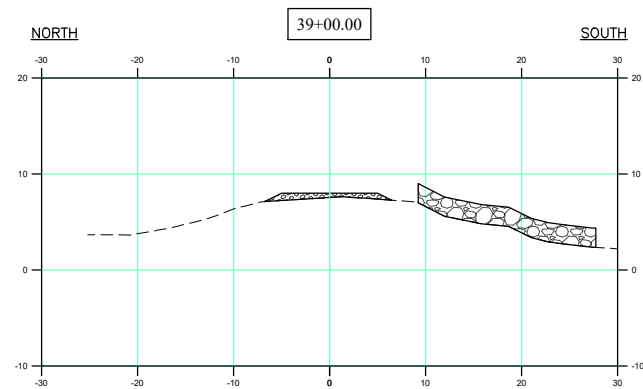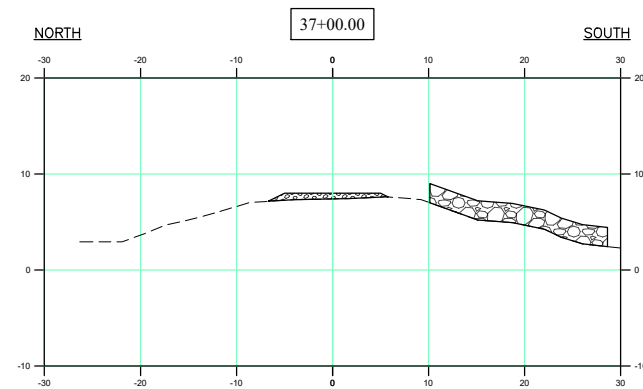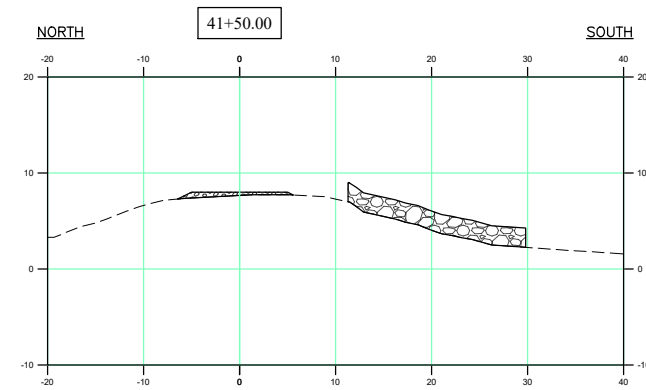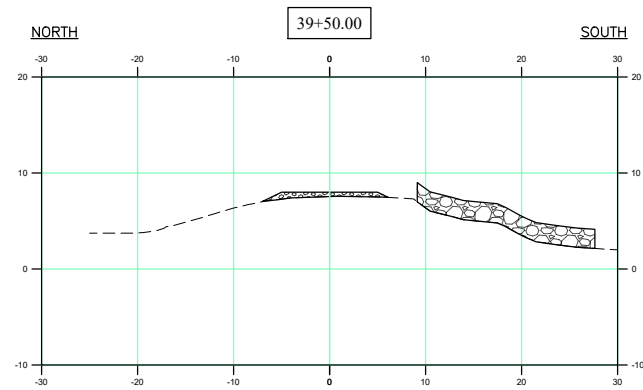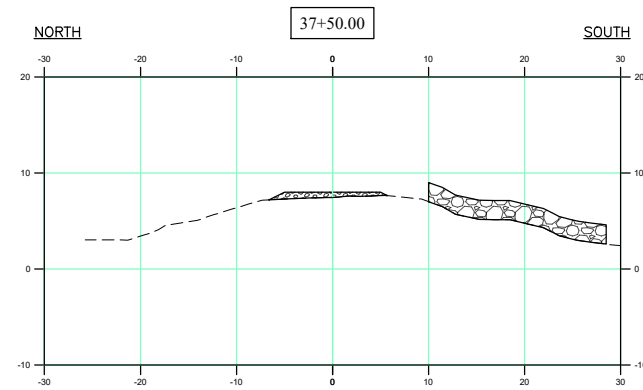


LEGEND

 - EXISTING GROUND
 - PROPOSED EARTHEN EMBANKMENT
 - PROPOSED RIP RAP (130LB CLASS)
 - PROPOSED 610 LIMESTONE FILL
 - PROPOSED CLEARING AND GRUBBING
 - CONCRETE MATS

 - PROPOSED EARTHEN EMBANKMENT - PROPOSED RIP RAP (130LB CLASS) - PROPOSED 610 LIMESTONE FILL

 - PROPOSED CLEARING AND GRUBBING

————— CONCRETE MATS



HORIZONTAL SCALE

NOTE: THE CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE PROJECT SITE PRIOR TO BIDDING THE WORK. THE TYPICAL WATER SURFACE ELEVATIONS WERE NOT SURVEYED. WATER SURFACE ELEVATIONS INSIDE CELL #2 WERE CONSISTENTLY HIGHER THEN IN THE SURROUNDING BAYOUS. THE BAYOUS ARE TIDALLY INFLUENCED AND WILL LIKELY DIFFER IN ELEVATIONS MORE THEN CELLS #1, #2, AND #3.

**ENGINEERING LLC**

Coastal Design & Infrastructure
197 Elysian Drive
Houma, Louisiana 70363
Phone: 985.219.1000

ENGINEERING • PLANNING • ENVIRONMENTAL CONSULTING

[illegible]

THIS DRAWING HAS
BEEN REDUCED TO
ONE HALF SIZE

THIS DOCUMENT IS THE PROPERTY OF GRAND ISLE
SHIP YARD ("GISY"). IT IS TO BE USED ONLY IN
CONNECTION WITH WORK BEING PERFORMED BY
GISY OR THE APPROVED CONTRACTOR.
REPRODUCTION IN WHOLE OR IN PART FOR ANY
PURPOSE OTHER THAN WORK PERFORMED BY
GISY OR THE APPROVED CONTRACTOR IS
FORBIDDEN EXCEPT BY EXPRESS WRITTEN
PERMISSION OF GISY. IT IS TO BE SAFEGUARDED
AGAINST BOTH DELIBERATE AND INADVERTENT
DISCLOSURE TO ANY THIRD PARTY.

**TERREBONNE PARISH
CONSOLIDATED GOVERNMENT**

**SOUTH PLANT OXIDATION POND
CELL NO. 2 LEVEE REPAIRS
(HURRICANE FRANCINE)**

SEGMENT 3
LEVEE REHAB
PROPOSED SECTIONS
(7 OF 8)

Project number	39130-1683
Date	JUNE 2026
Designed by	KDK
Drawn by	MRJ, MAC
Checked by	DV
Checked by	MAC
Plot Date	July 21, 2026

